

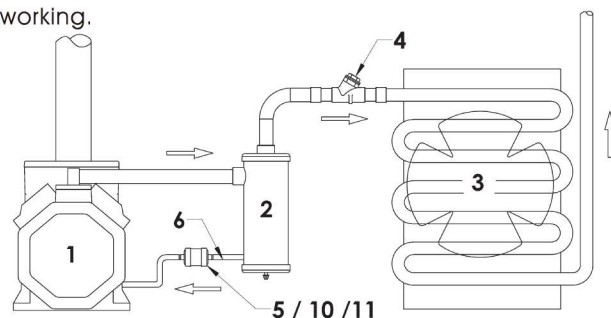


Oil filter can filtrate 99% of 3 micron grain but still have enough flow rate to maintain the low pressure drop. Oil filter has a very high capacity of filtration. It can return the cleanness POE oil and mineral oil back to the compressor. The clean oil not only can make sure the oil regulator working properly but also can reduce the abrasion of the compressor. Oil filter actually can release changing oil for compressor that caused by suspend feculence during the working.

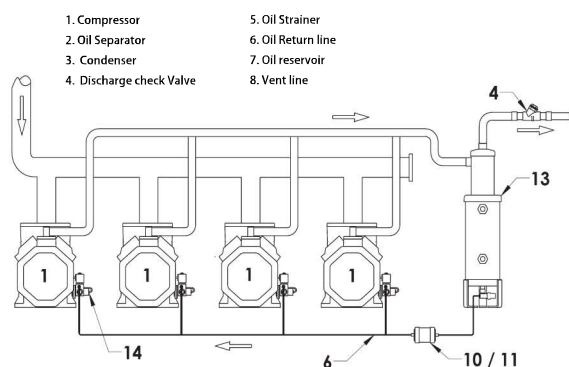

型 号 Type	连接口 (in) Connection Size		流体制冷量 (KW) Liquid Refrigeration Volume				A(mm)	B(mm)	D(mm)
	焊接口 ODF	螺纹口 SAE	R134a	R22	R404a	R502			
OF -083		3/8	21.8	23.7	15.7	15.4	155	98	63.5
OF -083S	3/8		27.4	29.8	19.8	19.3	146		
OF -084		1/2	21.8	23.7	15.7	15.4	163		
OF -084S	1/2		27.4	29.8	19.8	19.3	148		
OF -085		5/8	27.4	29.8	19.8	19.3	146		

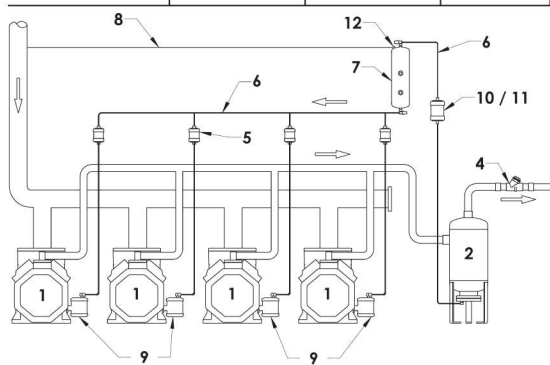

1-1/4-12UNF-2A
检修阀
Access valve

