
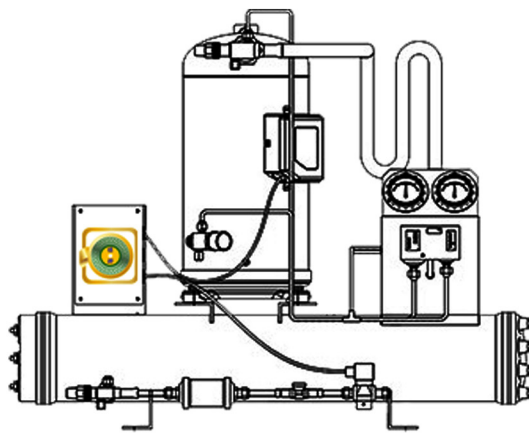


水冷 Water Cooled

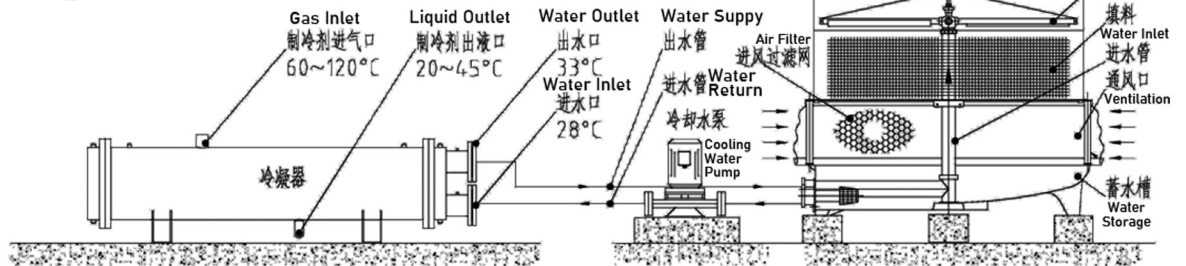

K01 - WT - 02 - H - S

冷凝机组
Condensing Unit


- WT = Tube & Shell 壳管式
- WC = Coaxial HEX 同轴换热器
- WP = BPHE 不锈钢板换
- WS = Coils 盘管

- S = R404a
- H = R22
- Z = R410A
- L = R290a

H = HBP 中高背压
M = MBP 中低背压

Compressor Power (HP/displacement m³/h)
压缩机电机 (匹数/排气量m³/h)



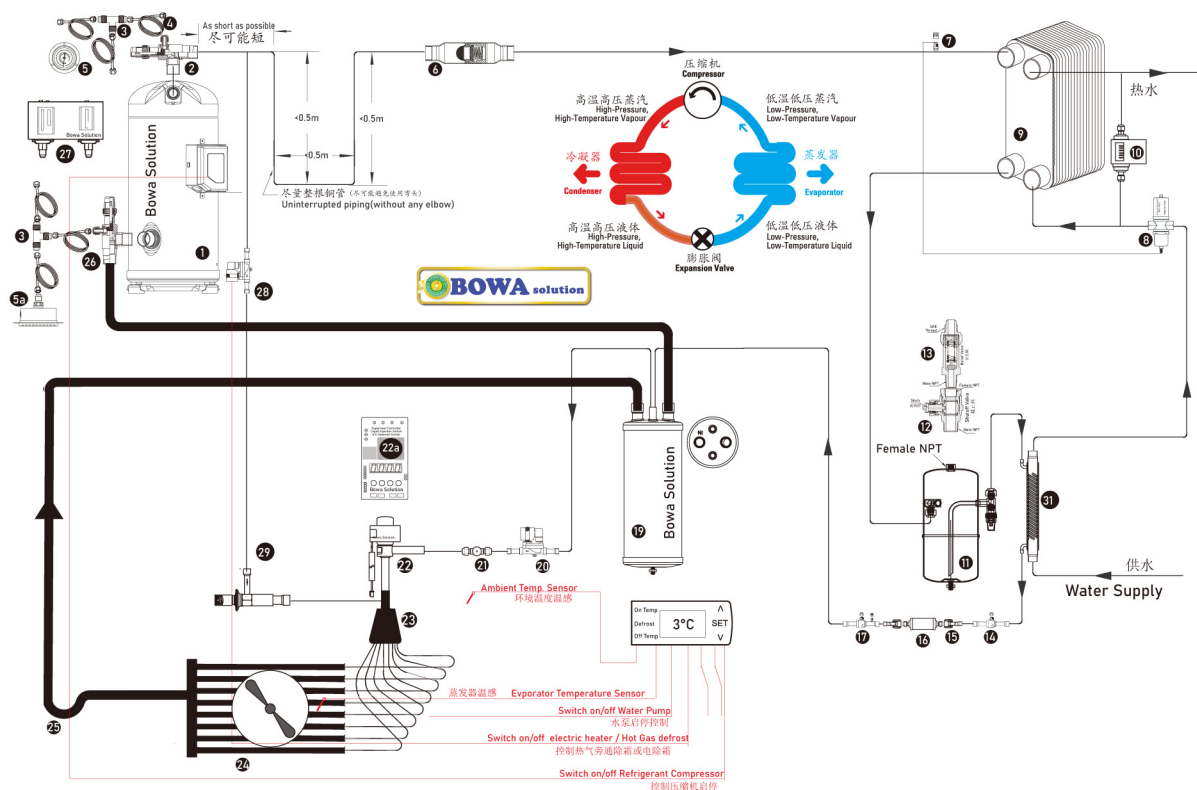

高温机组 high temperature

机 组 型 号 Model Nos.			K01WT5H	K01WT6H	K01WT8H	K01WT9H	K01WT10H	K01WT15H
适用 温度 Temperature range (℃)			-15～15℃					
制 冷 剂 Refrigerant			R404A					
电 源 Power Supply			3 8 0 V / 5 0 H Z					
冷 凝 器 Condenser	形 式 Type		壳管式冷凝器 Shell & tube heat exchanger					
	额 定 水 流 量 Flow Rate (m3/h)		3.2	3.7	5	5.5	6.6	9.6
	接 管 规 格 Inlet & Outlet		RC1-1/2	RC1-1/2	RC1-1/2	RC1-1/2	RC1-1/2	RC1-1/2
制 冷 量 Cooling Capacity	蒸发温度+5℃	Q (W)	13350	22300	24100	26334	30096	41500
		P (W)	3710	4210	5720	6530	7520	11650
	蒸发温度-5℃	Q (W)	9980	16550	18050	23100	21400	31000
		P (W)	3760	4280	5760	6390	7390	11400
	蒸发温度-12℃	Q (W)	7940	13000	14300	18100	16950	24400
		P (W)	3760	4310	5650	6350	7300	11250
接 口 Connection	液管 Liquid line		1/2″	1/2″	5/8″	5/8″	5/8″	5/8″
	吸气管 Suction Line		7/8″	7/8″	7/8″	1-3/8″	1-3/8″	1-5/8″

高温机组 high temperature

机组型号 Model Nos.		K01WT5M	K01WT6M	K01WT8M	K01WT9M	K01WT10M	K01WT13M	K01WT15M
适用温度 Temperature range (°C)		-5~-25°C						
制冷剂 Refrigerant		R404A						
电 源 Power Supply		3 8 0 V / 5 0 H Z						
冷凝器 Condenser	形式 Type	壳管式冷凝器 Shell & tube heat exchanger						
	额定水流量 Flow Rate (m ³ /h)	2.8	3.3	4.9	5.5	6.3	7.5	9.1
	接管规格 Inlet & Outlet	RC1-1/2	RC1-1/2	RC1-1/2	RC1-1/2	RC1-1/2	RC1-1/2	RC1-1/2
制冷量 Cooling Capacity	蒸发温度+5°C	Q (W)	9120	11100	15600	18750	21400	24400
		P (W)	3760	4280	5670	6390	7390	9470
	蒸发温度-5°C	Q (W)	7830	9530	13250	16150	18150	20900
		P (W)	3760	4300	5650	6360	7330	9380
	蒸发温度-12°C	Q (W)	5570	6740	9030	11500	12600	14450
		P (W)	3760	4310	5620	6290	7180	9350
接口 Connection	液管 Liquid line	1/2"	1/2"	5/8"	5/8"	5/8"	5/8"	5/8"
	吸气管 Suction Line	7/8"	7/8"	1-1/8"	1-3/8"	1-3/8"	1-3/8"	1-5/8"

