
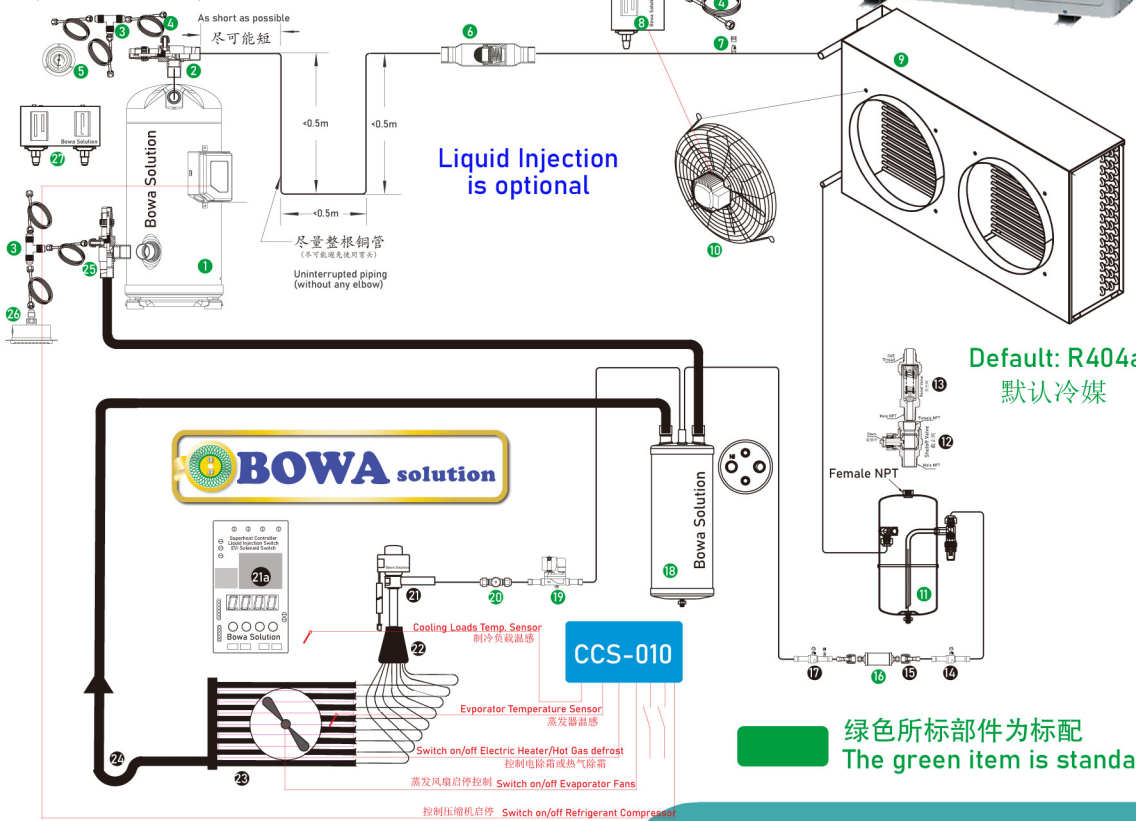
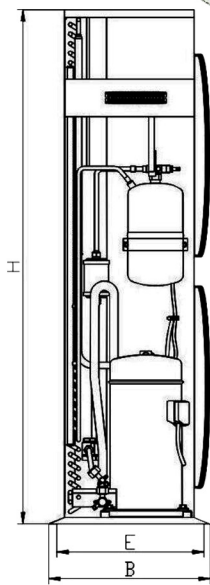
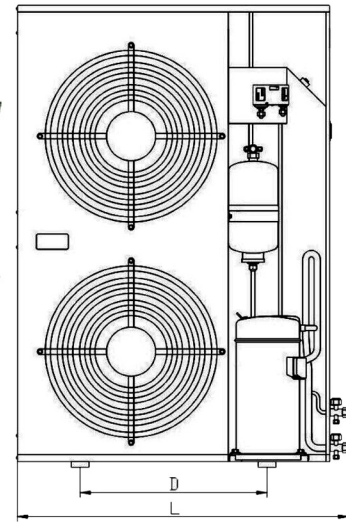


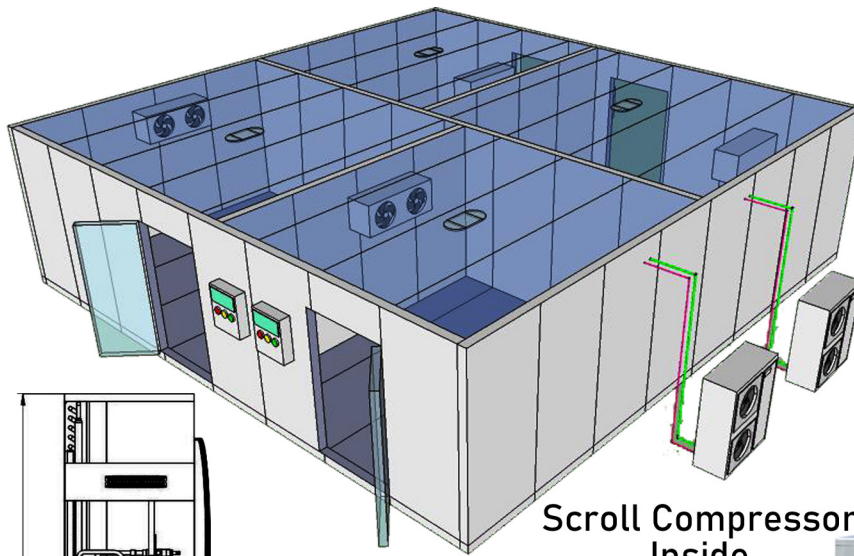

绿色所标部件为标配
The green item is standard

制冷量基于环温32°C;Cooling Capacity is basing on Ambient Temp. 32°C

机组型号 Model Number		K01L02A-S	K01L03A-S	K01L04A-S	K01L05A-S	KL01L06A-S
适用库温 Room Temp. Range(°C)		10~-15°C				
制冷剂 Refrigerant		R404A				
电源 Power Supply		220V/380V 50Hz			380V/50Hz	
冷凝风扇 Cond. Fan	风机数量 Qty (set)	1	1	2	2	2
	风量 Flow Vol. (m3/h)	1×3200	1×3200	2×3200	2×3200	2×3200
	风机功率 Power (W)	1×60	1×60	2×60	2×60	2×60
制冷量 Cooling Capacity	蒸发温度 E.T.: +5°C	冷量(W)	5270	7910	10450	12250
		功率(W)	1920	3020	4100	5440
	蒸发温度 E.T.: -5°C	冷量(W)	3750	5100	7000	8850
		功率(W)	1990	3100	3900	4700
	蒸发温度 E.T.: -12°C	冷量(W)	2920	4100	5600	7200
		功率(W)	1910	2980	3700	4480
接口 Connection	液管 Liquid Line	3/8"	3/8"	1/2"	1/2"	1/2"
	吸气管 Suction Line	5/8"	5/8"	3/4"	3/4"	3/4"
外形尺寸 Overall Dimension		长(L)mm	970	970	970	970
		宽(B)mm	410	410	410	410
		高(H)mm	835	835	1330	1330
安装尺寸 Installation size		长(D)mm	625	625	625	625
		宽(E)mm	380	380	380	380

机组型号 Model Number		K01L02A-H	K01L03A-H	K01L04A-H	K01L05A-H	KL01L06A-H
适用库温 Room Temp. Range(°C)		10~-15°C				
制冷剂 Refrigerant		R22				
电源 Power Supply		220V/380V 50Hz			380V/50Hz	
冷凝风扇 Cond. Fan	风机数量 Qty (set)	1	1	2	2	2
	风量 Flow Vol. (m3/h)	1×3200	1×3200	2×3200	2×3200	2×3000
	风机功率 Power (W)	1×60	1×60	2×60	2×60	2×60
制冷量 Cooling Capacity	蒸发温度 E.T.: +5°C	冷量(W)	5190	7110	11000	12510
		功率(W)	1820	2590	3300	4260
	蒸发温度 E.T.: -5°C	冷量(W)	4050	5840	7300	9270
		功率(W)	1860	2530	2980	3780
	蒸发温度 E.T.: -12°C	冷量(W)	2930	4050	5450	6880
		功率(W)	1890	2530	2790	3400
接口 Connection	液管 Liquid Line	3/8"	3/8"	1/2"	1/2"	1/2"
	吸气管 Suction Line	5/8"	5/8"	3/4"	3/4"	3/4"
外形尺寸 Overall Dimension		长(L)mm	970	970	970	980
		宽(B)mm	410	410	410	410
		高(H)mm	835	835	1330	1330
安装尺寸 Installation size		长(D)mm	625	625	625	625
		宽(E)mm	380	380	380	380