




Displacement (1450RPM)	R410a		Cooling Capacity	
	E.T.	C.T	Watts	BTU
16.2m3/h (3HP)	-64°C	-24°C	7429	25355
	-70°C	-27°C	5520	18840
	-74°C	-29.4°C	4185	14283
	-80°C	-33°C	2919	9962
22.5m3/h (4HP)	-64°C	-24°C	10310	35188
	-70°C	-27°C	7476	25515
	-74°C	-29.4°C	5812	19836
	-80°C	-33°C	4046	13809
26.8m3/h (5HP)	-64°C	-24°C	12308	42007
	-70°C	-27°C	8924	30457
	-74°C	-29.4°C	6938	23679
	-80°C	-33°C	4830	16485
32.5m3/h (6HP)	-64°C	-24°C	14926	50942
	-70°C	-27°C	10824	36942
	-74°C	-29.4°C	8415	28720
	-80°C	-33°C	5859	19997
41.3m3/h (8HP)	-64°C	-24°C	18964	64724
	-70°C	-27°C	13756	46949
	-74°C	-29.4°C	10688	36478
	-80°C	-33°C	7448	25420
48.5m3/h (10HP)	-64°C	-24°C	22287	76065
	-70°C	-27°C	16164	55167
	-74°C	-29.4°C	12563	42877
	-80°C	-33°C	8750	29863
56.25m3/h (12HP)	-64°C	-24°C	25806	88075
	-70°C	-27°C	18716	63877
	-74°C	-29.4°C	14543	49635
	-80°C	-33°C	10129	34570



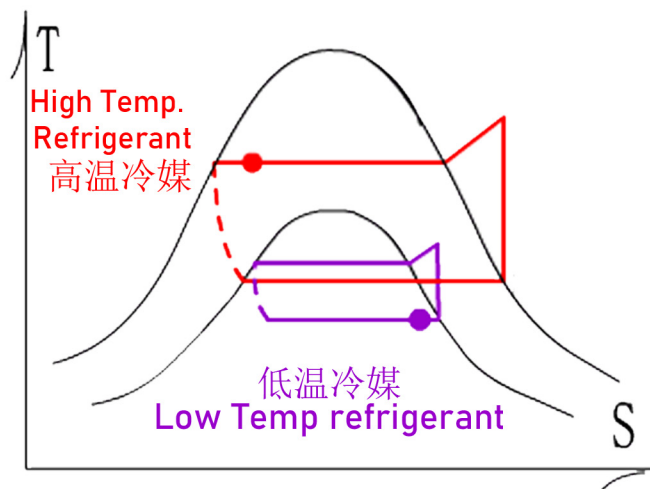

Displacement (1450RPM)	R410a		Cooling Capacity	
	E.T.	C.T	Watts	BTU
73.6m <sup>3</sup> /h (15HP)	-64°C	-24°C	33796	115345
	-70°C	-27°C	24508	83645
	-74°C	-29.4°C	19050	65017
	-80°C	-33°C	13265	45273
84.5m <sup>3</sup> /h (20HP)	-64°C	-24°C	38828	132519
	-70°C	-27°C	28160	96109
	-74°C	-29.4°C	21885	74693
	-80°C	-33°C	15246	52034
110.5m <sup>3</sup> /h (25HP)	-64°C	-24°C	50736	173160
	-70°C	-27°C	36796	125584
	-74°C	-29.4°C	28598	97604
	-80°C	-33°C	19915	67969
126.8m <sup>3</sup> /h (30HP)	-64°C	-24°C	58242	198778
	-70°C	-27°C	42244	144177
	-74°C	-29.4°C	32828	112041
	-80°C	-33°C	22869	78051
151.6m <sup>3</sup> /h (40HP)	-64°C	-24°C	69632	237652
	-70°C	-27°C	50500	172355
	-74°C	-29.4°C	39248	133952
	-80°C	-33°C	27335	93294