



CCS-003S 标准型 Text Panel 文本屏	CCS-003P 轻奢型 4.3" Touch Screen 4.3"触摸屏	CCS-003D 顶配 7" Touch Screen 7"触摸屏	Qty. 数量	Remark 备注
			1	三者择其一 Choose one
Logic PCB board 逻辑板			1	
Voltage Transformer 变压器 (11A)			1	220Vac-->11Vac
NTC Sensors NTC温感 (3m Length)			12	B3950,10K
Current Transformer 电流互感器 (1.5m cable)			2	4 channels


Logic board with analog inputs, switch on/off outputs and I/O device summary
逻辑板模拟量, 输入开关量, 输出I/O设备概要

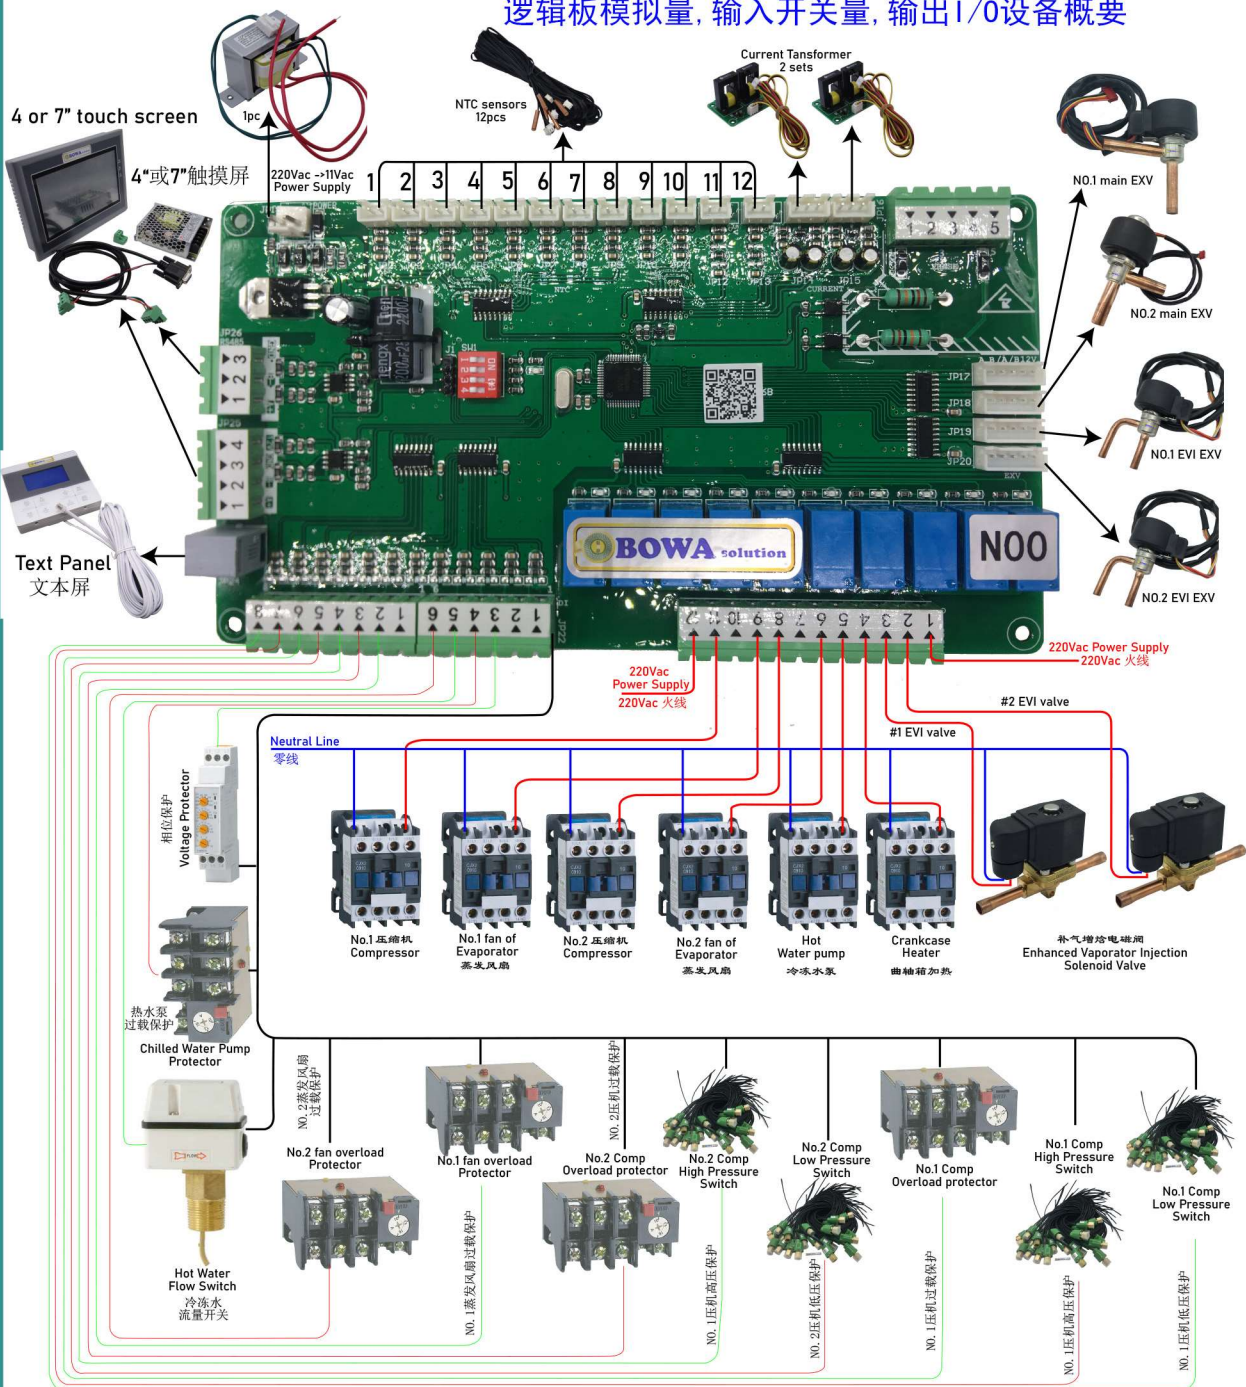


NTC sensor installation Guide

温感安装导图

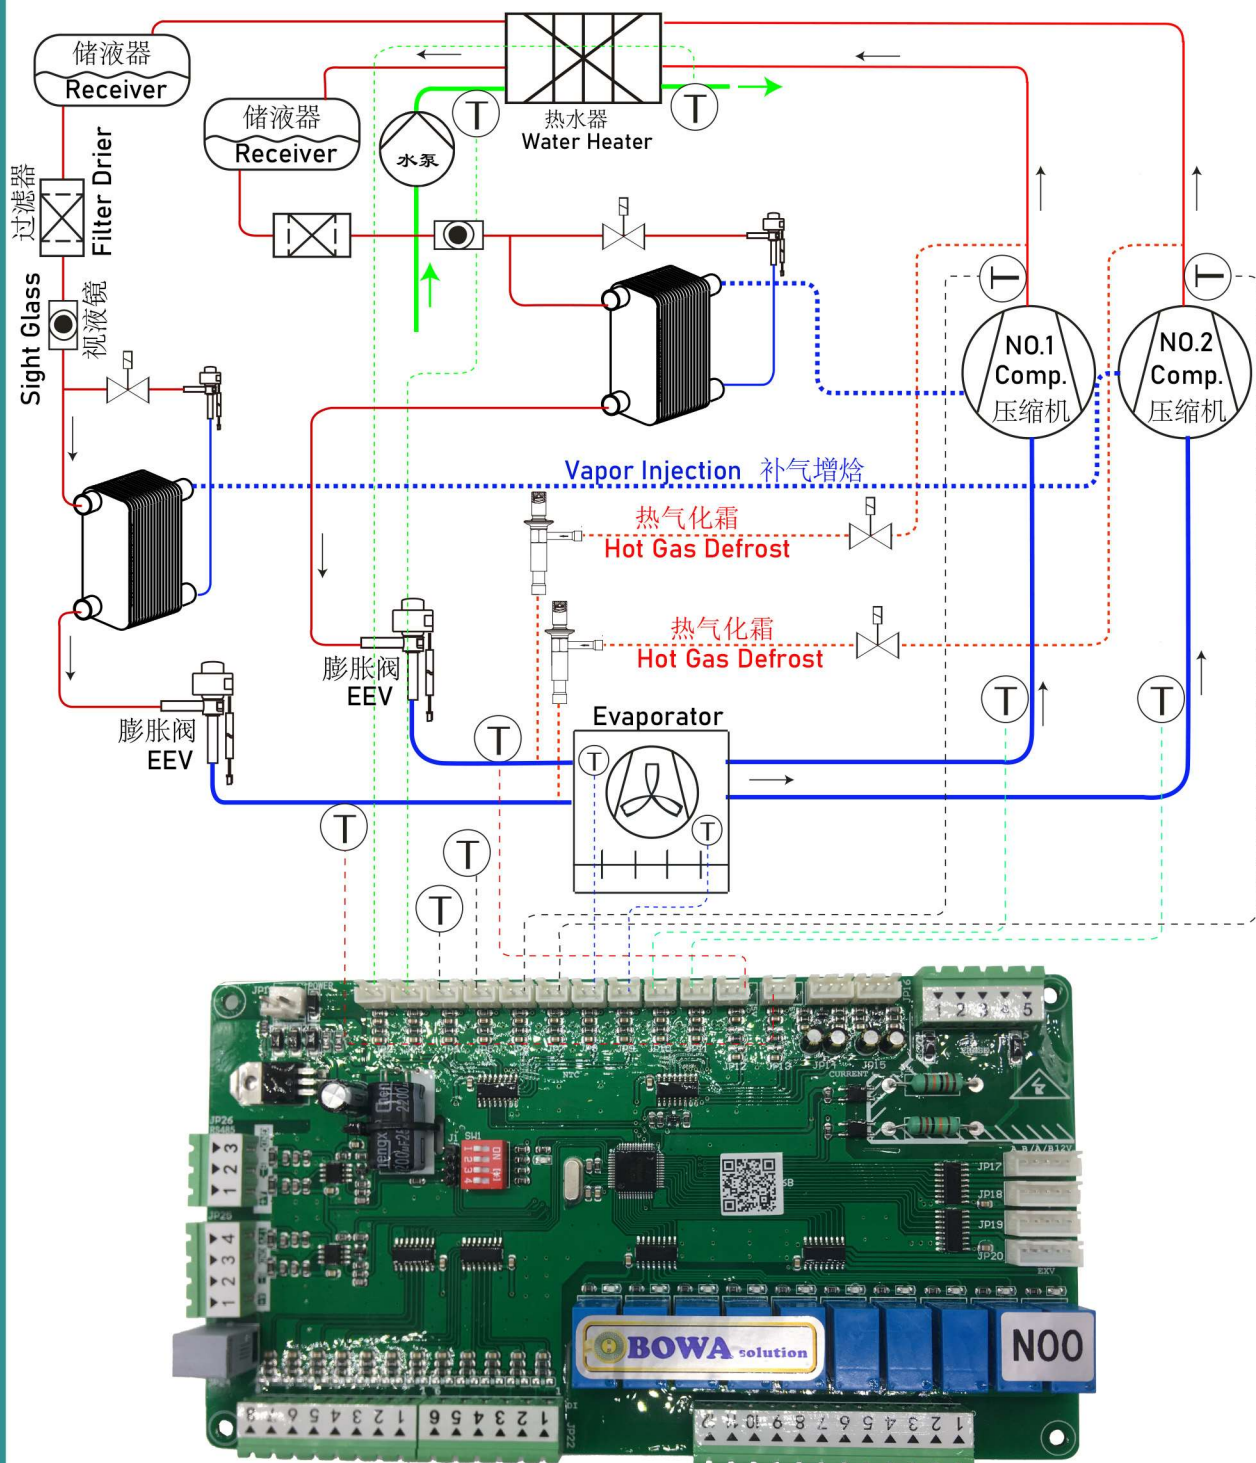


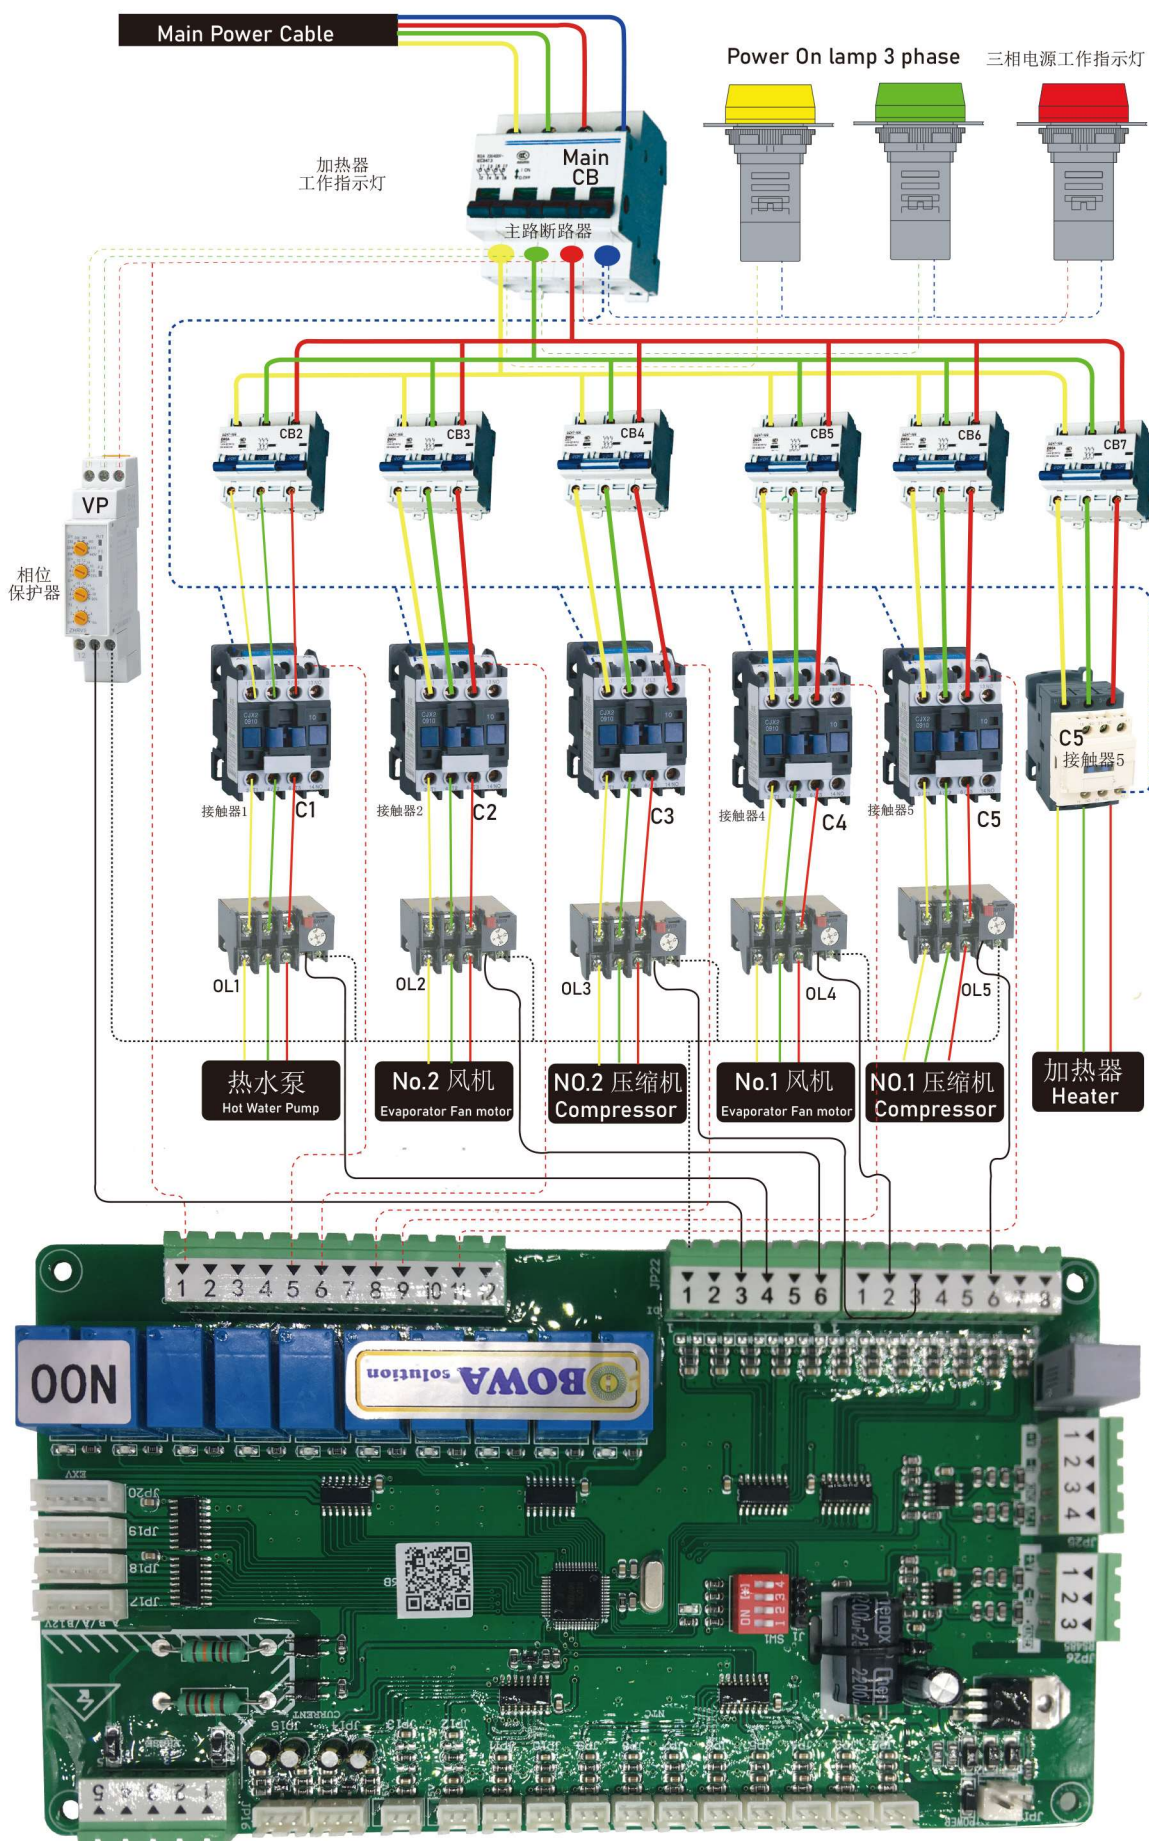

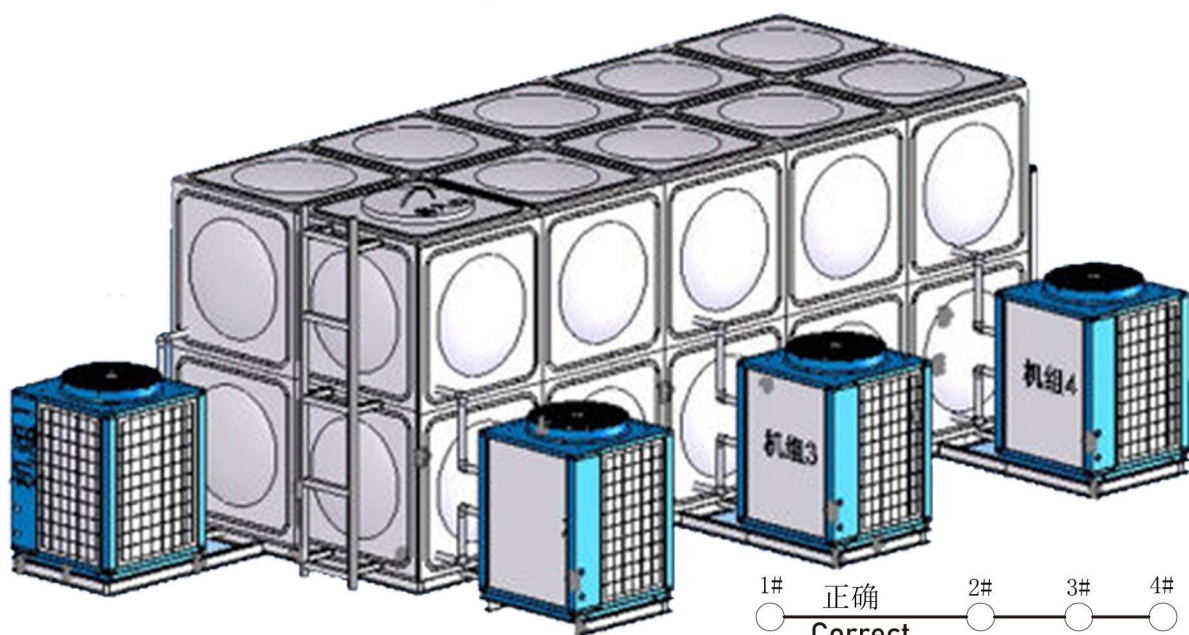


Network wiring diagram

组网接线图

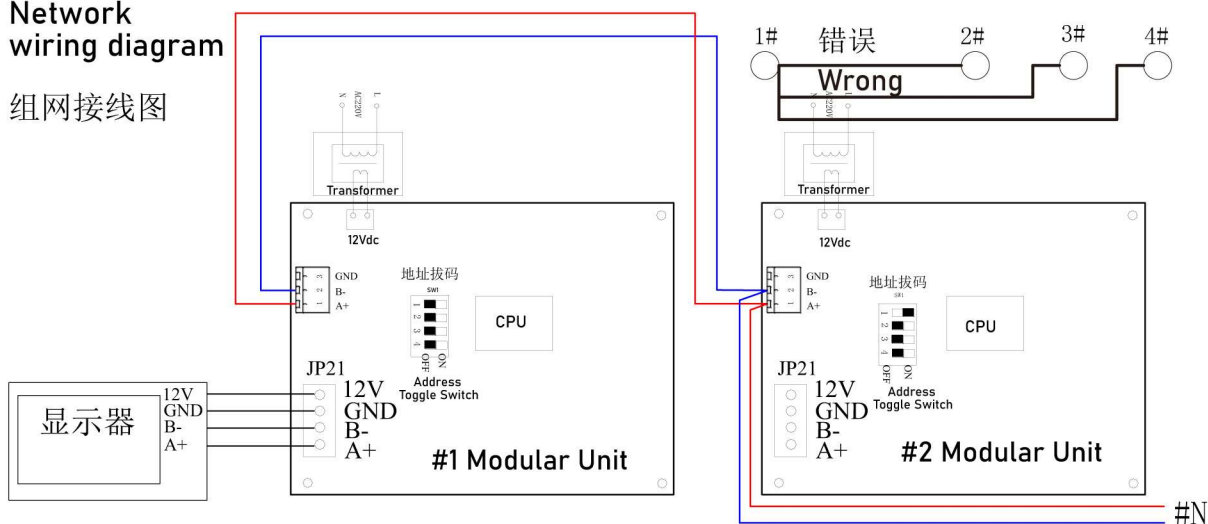

1	1 2 3 4	ON OFF	5	1 2 3 4	ON OFF	9	1 2 3 4	ON OFF	13	1 2 3 4	ON OFF
2	1 2 3 4	ON OFF	6	1 2 3 4	ON OFF	10	1 2 3 4	ON OFF	14	1 2 3 4	ON OFF
3	1 2 3 4	ON OFF	7	1 2 3 4	ON OFF	11	1 2 3 4	ON OFF	15	1 2 3 4	ON OFF
4	1 2 3 4	ON OFF	8	1 2 3 4	ON OFF	12	1 2 3 4	ON OFF	16	1 2 3 4	ON OFF

Capacity regulating logic 能量调节逻辑

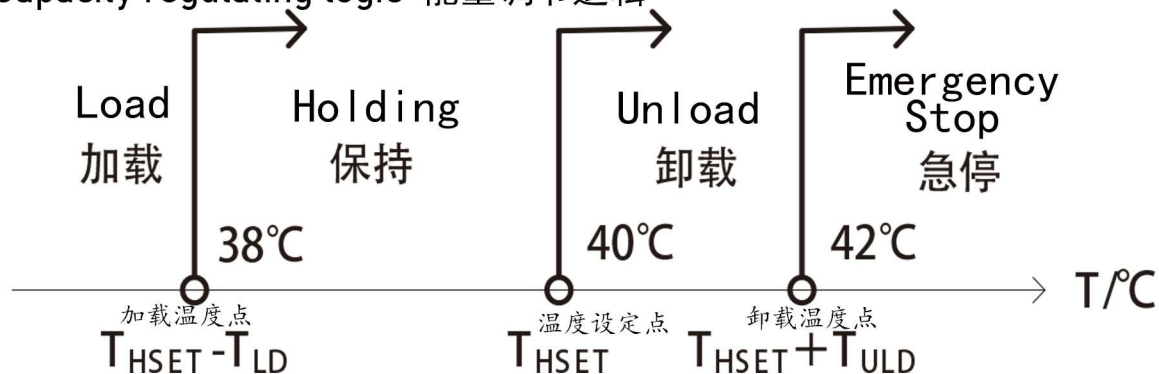

T_{HSET} = Temperature setting 温度设定值;

T_{ULD} = Temperature hysteresis to unload = Default 2°C, adjustable 0.2~9.9°C
卸载温度差值=默认2°C, 0.2~9.9°C之间可调;

T_{LD} = Temperature hysteresis to load = Default 2°C, adjustable 0~9.9°C
加载温度差值=默认2°C, 0~9.9°C之间可调

* Regulating circle = 30seconds, adjustable 10~240s
调节周期 = 30秒, 10~240s之间可调

