



Electronic expansion valves are designed for use in airconditioning and refrigeration systems or in heat pumps. The valve controls the automatic adjustment of refrigerant flow rate and makes the system work under optimized conditions for the purpose of fast cooling or heating, precise temperature control and energy saving. The valve can also be used e.g. for suction line pressure controls. These valves provide bidirectional operation to control the refrigerant flow rate in heating or cooling mode.

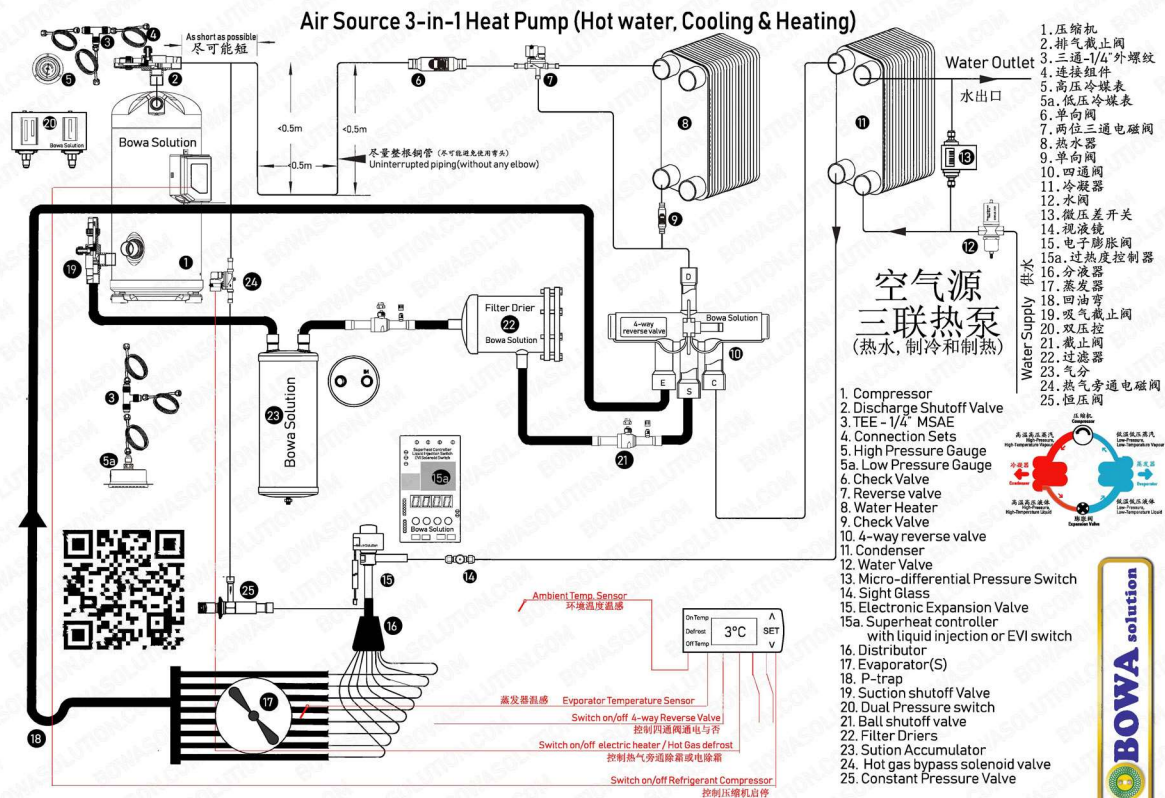





FEATURES

- 5-wire or 6-wire coil is optional
- Applicable for oil-free system
- Smaller installation space : low height, small volume , light weight
- Optimized flow path design for noise reduction
- Fast operation, energy saving
- Applicable for reversible systems like heat pumps: bidirectional flow

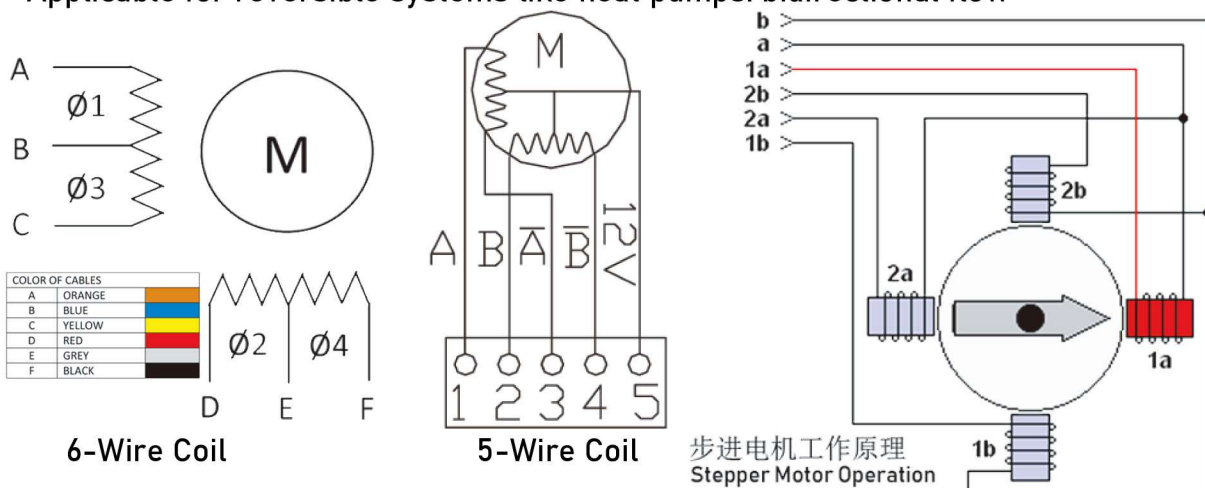

General Specifications

- Applicable for all common HCFC & HFC refrigerants such as: R22, R134a, R404A, R407C, R410A, R507A.
- Cooling capacity: 3,5 to 105 kW (R22 nominal capacity)
- 500 steps (full stroke); 32 ± 20 opening steps
- Medium temperature min./max.: -30°C / +70°C (duty cycle rate below 50%)
- Ambient temperature min./max.: -30°C / +60°C (duty cycle rate below 50%)
- Relative humidity: 0 to 95% RH
- Installation position:
 1. Coil installed in the upwards position, valve rotor central axis within ±15° versus vertical axis
 2. Inlet connection preferably sideways, outlet preferably downwards

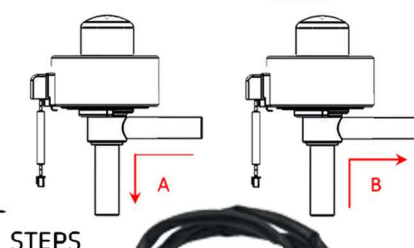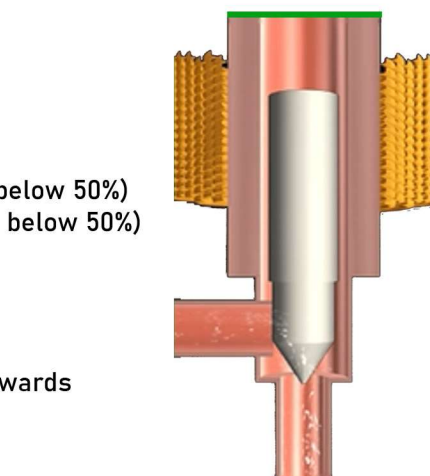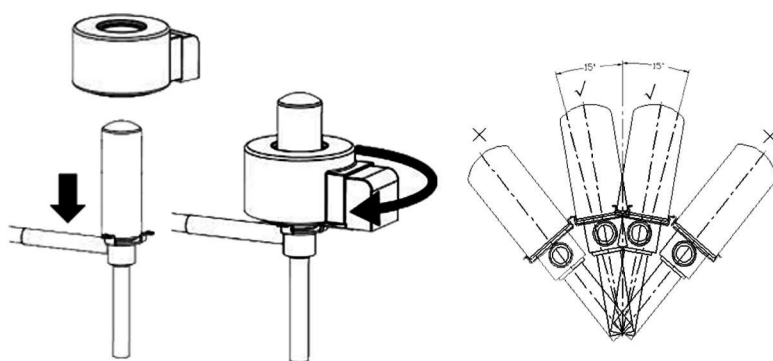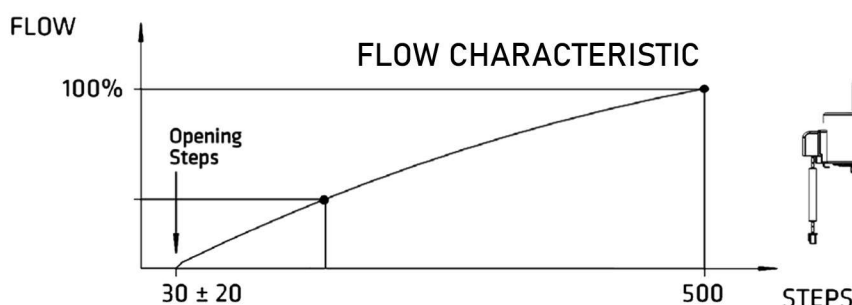

Electrical Parameters

- Rated voltage: 12V DC (± 10%), rectangular wave
- Actuating mode: 4-phase 8-step permanent magnet stepping motor of direct-acting type
- Excitation mode: 1 ~ 2 phase excitation, monopole actuation
- Excitation rate:
 - Seat Ø 1,3 to 3,2 mm: 30 to 90pps
 - Seat Ø 4,0 to 6,5 mm: 30 to 40pps
- Activation of self-holding mechanism: Maintain excitation in stop position min. 0,1~1,0 sec.
- Min. motion time from completely open to completely closed:
 - Seat Ø 1,3 to 3,2 mm: 6s @ 90pps
 - Seat Ø 4,0 to 6,5 mm: 13s @ 40pps
- Coil current:
 - Seat Ø 1,3 to 3,2 mm: 260mA/phase (20°C)
 - Seat Ø 4,0 to 6,5 mm: 375mA/phase (20°C)
- Coil resistance:
 - Seat Ø 1,3 to 3,2 mm: 46 ± 3.7 Ω/phase (20°C)
 - Seat Ø 4,0 to 6,5 mm: 32 ± 3.2 Ω/phase (20°C)
- Insulation class of coil: E
- Protection class: IP 66

GENERAL CHARACTERISTICS

Valve Model	Part Number ¹⁾	Seat ϕ (mm)	Kv (m ³ /h)	Nominal Cooling Capacity ²⁾ [kW]					MOP Max. Oper. Press. [MPa]	MOPD Direct [MPa]	MOPD Rev. (MPa)
				R22	R134a	R407C ³⁾	R404A R507A	R410A			
EEV(T01)1.3C-07	EEV-B1001	1,3	0,05	3,5	2,7	3,5	2,5	4,2	4,5	3,5	≥2.1
EEV(T01)1.65C-05	EEV-B1002	1,65	0,08	5,3	4,1	5,3	3,7	6,36			
EEV(T01)1.8C-08	EEV-B1003	1,8	0,1	7	5,4	7	4,9	8,4			
EEV(T01)2.0C-03	EEV-B1004	2	0,16	8,8	6,7	8,75	6,1	10,5			
EEV(T01)2.2C-01	EEV-B1005	2,2	0,2	11	8,1	10,5	7,4	12,6			
EEV(T01)2.4C-01	EEV-B1006	2,4	0,23	18	13,5	17,5	12,3	21			
EEV(TS1)3.0C-01	EEV-B1007	3	0,39	21	16,2	21	14,7	25,2			≥1.47
EEV(TS1)3.2C-01	EEV-B1008	3,2	0,43	28	21,6	28	19,6	33,6			
EEV(S03)4.0C-01	EEV-B1009	4	0,5	42	32,3	42	29,4	50,4			≥0.7
EEV(S03)4.5C-01	EEV-B1010	4,5	0,7	53	40,4	52,5	36,8	63			
EEV(S03)5.5C-01	EEV-B1011	5,5	0,9	70	53,9	70	49,0	84			
EEV(S03)6.5C-02	EEV-B1012	6,5	1,1	105	80,9	105	73,5	126		3,0	

Note:

1) Extent of delivery without coil

2) Nominal working conditions: Condensing Temperature 38°C; Evaporating Temperature 5°C; Sub-cooling 0K; Superheat 0K



3) R407C data based on dew point conditions

DIMENSIONS

COIL	CABLE	EXCITATION							
		1	2	3	4	5	6	7	8
Ø1	A	ON	ON	OFF	OFF	OFF	OFF	OFF	ON
Ø2	D	OFF	ON	ON	ON	OFF	OFF	OFF	OFF
Ø3	C	OFF	OFF	OFF	ON	ON	ON	OFF	OFF
Ø4	F	OFF	OFF	OFF	OFF	OFF	ON	ON	ON

Valve Model	Coil Series	Valve Dimensions [mm]				
		F	G	H	Ød	ØN
EEV(T01)1.3C-07 to EEV(T01)2.4C-01	B10-C10	78	36	30	6,35	17,3
EEV(TS1)3.0C-01 to EEV(TS1)3.2C-01		82	40	30	7,94	17,3
EEV(S03)4.0C-01 to EEV(S03)6.5C-02	B10-M03	148	64,7	63,4	15,88	35,3

Valve Model	Coil Model	Coil Dimensions [mm]					Coil Part Number
		ØA	B	C	D	E	
EEV(T01)1.3C-07 to EEV(TS1)3.2C-01	B10-C10 001	38,5	26,4	25,6	700	600	EEV-B10C01
EEV(S03)4.0C-01 to EEV(S03)6.5C-02	B10-C03 001	67,5	42,4	33	700	600	EEV-B10C02

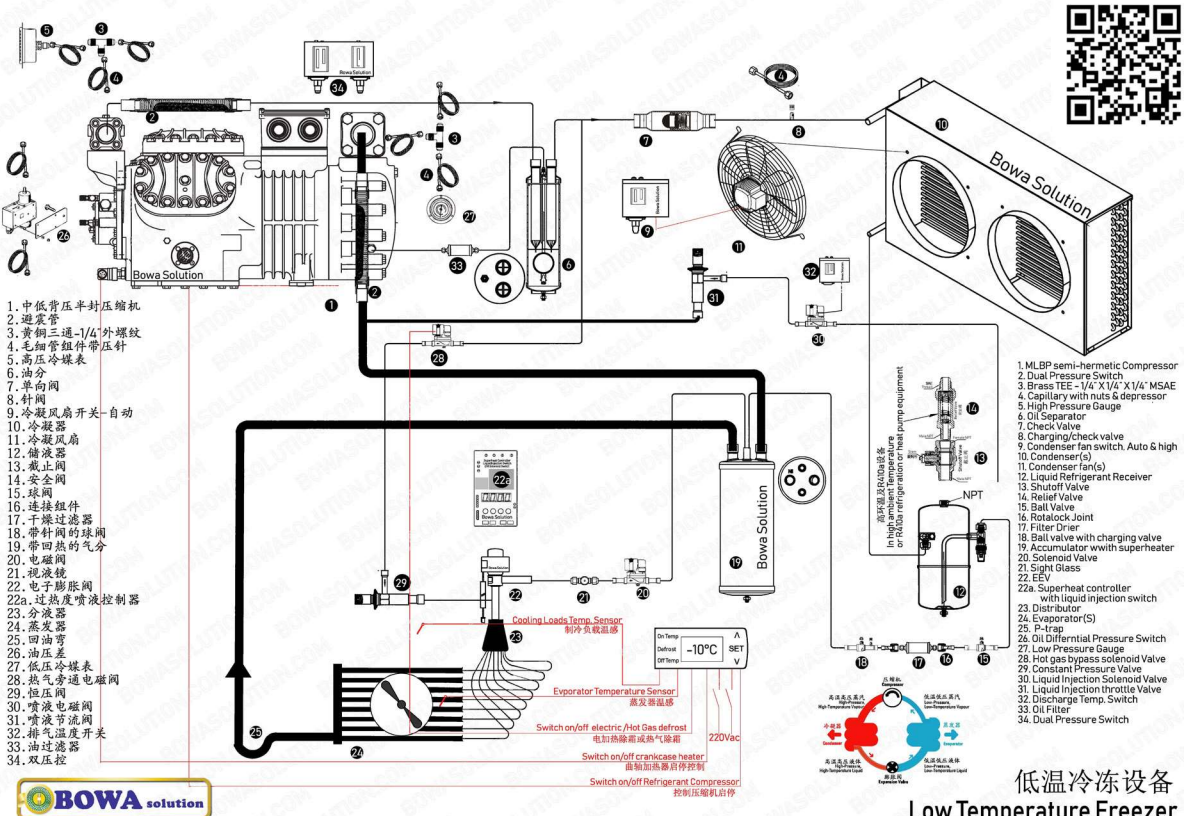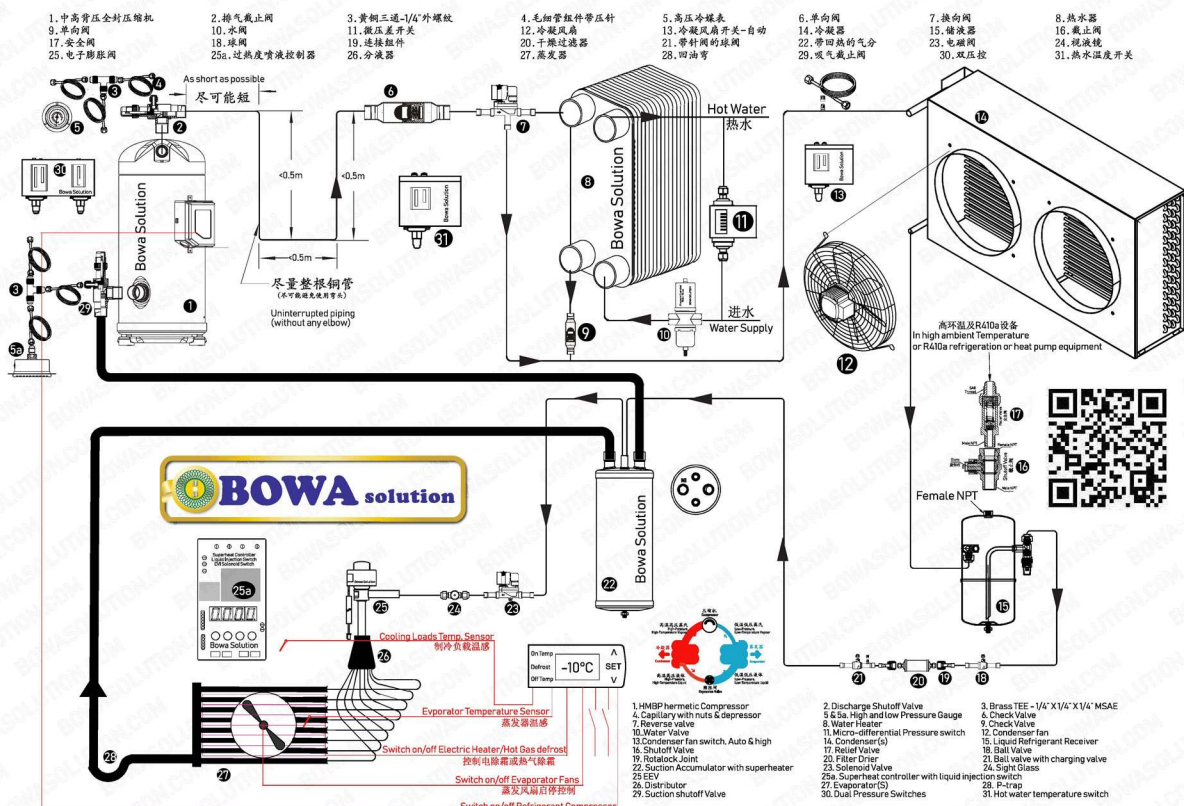

低温冷冻设备
Low Temperature Freezer