
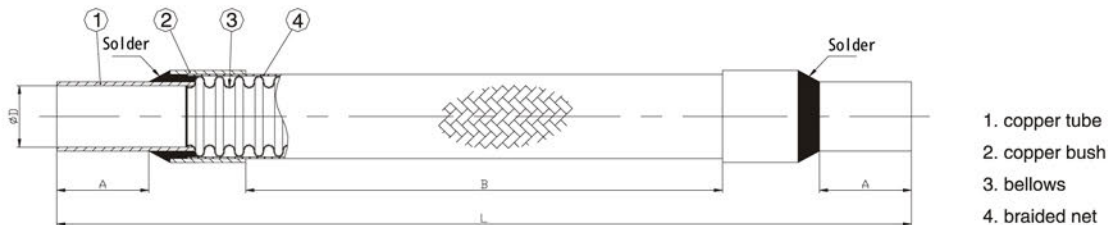


◆ The vibration damping bellows are connection tube for vibration resistance, which could be used to prevent tube from cracking due to high frequency vibration.

◆ The vibration damping bellows are used as air suction and exhaust tube of compressor in the freezer, cold store and air conditioning unit.




### Feature

- ◆ Made of full stainless steel bellows.
- ◆ Applicable refrigerants: CFC, HCFC and HFC.
- ◆ ODS connection and various lengths are available.
- ◆ Applicable medium temperature:  $-40^{\circ}\text{C} \sim +150^{\circ}\text{C}$

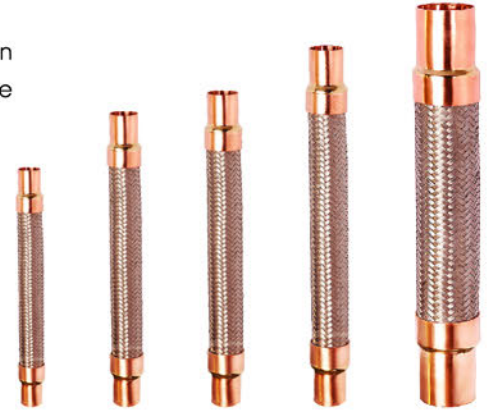

Model	Size	Overall Dimension				Max. Operating Pressure ( MPa )	Withstand Test Pressure ( MPa )	Burst Test Pressure ( MPa )
		A	B	ΦD	L			
VAH-10	3/8	20	130	9.8	210	3.0	4.5	15.0
VAH-12	1/2	23	140	12.8	230			
VAH-16	5/8	25	152	16.1	250			
VAH-19	3/4	28	165	19.1	260			
VAH-22	7/8	35	180	22.3	300			
VAH-25	1	35	205	25.5	330	2.5	3.6	12.5
VAH-28	1-1/8	35	205	28.7	330			
VAH-35	1-3/8	50	240	35.1	400			
VAH-42	1-5/8	55	255	41.4	430			
VAH-54	2-1/8	65	290	54.1	520			
VAH-67	2-5/8	76	355	66.8	610	2.0	3.0	10.0
VAH-79	3-1/8	88	405	79.5	680			

### Vibration Absorber Installation Recommendations

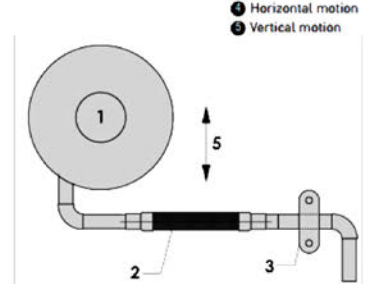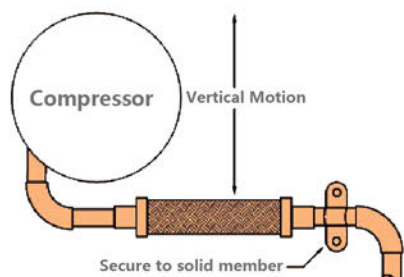

- ① Compressor
- ② Vibration eliminator
- ③ Secure to solid member
- ④ Horizontal motion
- ⑤ Vertical motion