



Model	Unit	HPW100	HPW170	HPW330	HPW450	HPW820
Heating capacity	kW	10	17	33	45	82
	BTU/h	34121	58,006	112,601	153,546	279,796
Capacity (Water)	L/H	230	480	960	1,200	2,400
Rated outlet water temp.	°C	55				
Max outlet water temp	°C	60				
Rated power input	kW	2.80	4.40	8.80	11.0	21.0
Refrigerant Charging Vol.	KG	2.1	3.0	3.0*2	3.5*2	5.5*2
Power supply	V/PH/Hz	220V/1PH/50Hz		380V/3PH/50HZ		
Cooling Capacity	kW	9.0	16.0	31.0	42.0	80.0
Rated power input		2.6	4.5	9.0	11.3	20.0
Return cold water temp.	°C	12				

Test condition:

Hot Water: Ambient temp.: 20°C, cool water temp.: 15°C, hot water temp.: 55°C

Cooling: Ambient temp.: 35°C, chilled water inlet: 12°C, chilled water Outlet: 7°C

Heating: Ambient temp.: 7°C, Heated water inlet: 40°C, Heated water outlet 45°C

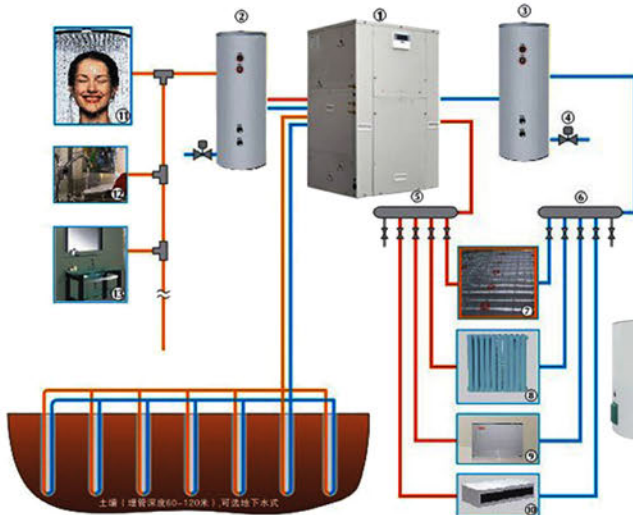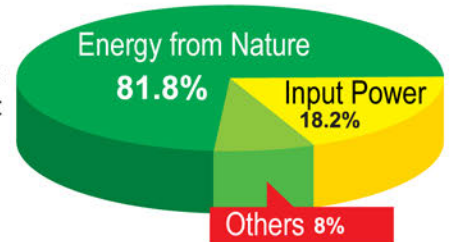

1

